

Telecoil-antennas Inductors

PAS1225V-SERIES

1. Features


1. Hearing Aid Compatibility-/Telecoil-antennas;
2. PAS1225V-series realizes small size and low profile. 11.6x3.8x2.5mm.
3. 100% Lead (Pb) & Halogen-Free and RoHS compliant.
4. Meets the T3/T4 FCC requirements (HAC) . ANSI C63.19
5. High reliability -Reliability tests comply with AEC-Q200
6. Operating temperature -55~+125°C (Including self - temperature rise)



2. Applications

1. T-coil/HAC-coil for hearing and aid compatible cell phones.
2. Decoupling in RF and IF-circuit.
3. Transponder antenna.


3. Dimensions

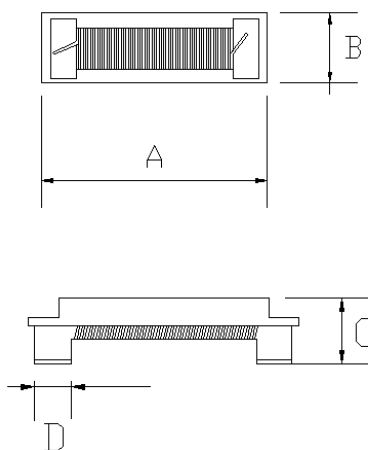

Size	A(mm)	B(mm)	C(mm)	D(mm)
PAS1225V	11.6±0.3	3.8±0.3	2.5±0.3	1.50 ref.

Unit:mm

Recommend PC Board Pattern



L(mm)	G(mm)	H(mm)
11.6	8.0	3.6

4. Part Numbering

PAS	1225	V	-	101	K
A	B	C		D	E

A: Series
 B: Dimension
 C: Category Code
 D: Inductance
 E: Inductance Tolerance

L x H
 V=Vehicle
 101=100uH
 K=±10% , J=±5%

5. Specification

Part Number	Inductance (uH)	Test Frequency (Hz)	Q min.	RDC (Ω)max.	Rated current (mA) max.	SRF (MHz) min.
PAS1225V-101K	100±10%	0.1V/125K	20	3	300	20.0
PAS1225V-201K	200±10%	0.1V/125K	20	6	200	2.00
PAS1225V-492J	4900±5%	0.1V/125K	20	50	50	0.34
PAS1225V-722J	7200±5%	0.1V/125K	40	40	50	0.30