


High Frequency Winding Type Chip Inductor SWI0402HV-SERIES

1. Features

1. Ceramic core wire wound construction.
2. No batch to batch variations in inductance
3. High Reliability due to ceramic wire wound construction.
4. High frequency application.
5. Small footprint as well as low profile.
6. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
7. High reliability -Reliability tests comply with AEC-Q200
8. Operating temperature-55~+125℃ (Including self - temperature rise)



2. Dimensions

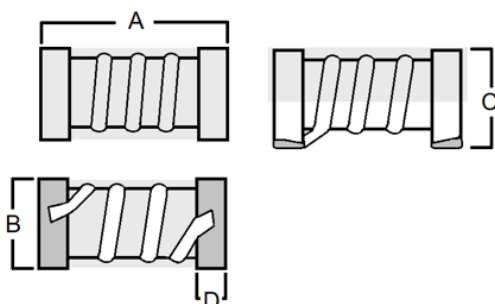

Size	A(mm)	B(mm)	C(mm)	D(mm)
SWI0402	1.00±0.20	0.60±0.20	0.56±0.10	0.20±0.1

Unit:mm

3. Part Numbering

SWI	0402	H	V	-	2N2	B
A	B	C	D		E	F

A: Series

B: Dimension

C: Material

D: Category Code

E: Inductance

F: Inductance Tolerance

LxW

4H Core

V=Vehicle

2N2=2.2nH

B = ±0.1nH, C=±0.2nH, S=±0.3nH, G=±2%, J=±5%, K=±10%

4. Specification

Part Number	Inductance (nH)	Tolerance	Test Frequency (Hz)	Q Typ.	Test Frequency	Rated Current (mA) max.	DCR (Ω) max.	SRF (GHz) Typ.
SWI0402HV-2N2□	2.2	B,C,S	0.1V/100M	30	0.1V/250M	2530	0.022	15.5
SWI0402HV-2N4□	2.4	B,C,S	0.1V/100M	30	0.1V/250M	2530	0.022	15.5
SWI0402HV-3N0□	3.0	B,C,S	0.1V/100M	20	0.1V/250M	1350	0.063	12.5
SWI0402HV-3N3□	3.3	B,C,S	0.1V/100M	30	0.1V/250M	2000	0.030	14.0
SWI0402HV-3N6□	3.6	B,C,S	0.1V/100M	30	0.1V/250M	1950	0.030	10.0
SWI0402HV-3N9□	3.9	B,C,S	0.1V/100M	35	0.1V/250M	1950	0.030	10.0
SWI0402HV-4N1□	4.1	B,C,S	0.1V/100M	30	0.1V/250M	1800	0.044	9.6
SWI0402HV-4N5□	4.5	B,C,S	0.1V/100M	34	0.1V/250M	1450	0.060	9.6
SWI0402HV-4N8□	4.8	B,C,S	0.1V/100M	30	0.1V/250M	1200	0.071	8.0
SWI0402HV-5N0□	5.0	B,C,S	0.1V/100M	32	0.1V/250M	1770	0.040	10.0
SWI0402HV-5N5□	5.5	G,J,K	0.1V/100M	35	0.1V/250M	1770	0.040	8.0

Part Number	Inductance (nH)	Tolerance	Test Frequency (Hz)	Q Typ.	Test Frequency	Rated Current (mA) max.	DCR (Ω) max.	SRF (GHz) Typ.
SWI0402HV-6N0□	6.0	G,J,K	0.1V/100M	32	0.1V/250M	1770	0.056	8.0
SWI0402HV-6N8□	6.8	G,J,K	0.1V/100M	30	0.1V/250M	1450	0.068	7.0
SWI0402HV-7N3□	7.3	G,J,K	0.1V/100M	32	0.1V/250M	1700	0.050	7.0
SWI0402HV-7N5□	7.5	G,J,K	0.1V/100M	32	0.1V/250M	1700	0.050	7.0
SWI0402HV-8N2□	8.2	G,J,K	0.1V/100M	32	0.1V/250M	1500	0.069	6.5
SWI0402HV-8N7□	8.7	G,J,K	0.1V/100M	31	0.1V/250M	1420	0.070	6.5
SWI0402HV-9N0□	9.0	G,J,K	0.1V/100M	30	0.1V/250M	1420	0.070	6.5
SWI0402HV-10N□	10.0	G,J,K	0.1V/100M	31	0.1V/250M	1400	0.081	6.0
SWI0402HV-11N□	11.0	G,J,K	0.1V/100M	32	0.1V/250M	1400	0.083	6.2
SWI0402HV-12N□	12.0	G,J,K	0.1V/100M	30	0.1V/250M	1240	0.093	5.2
SWI0402HV-13N□	13.0	G,J,K	0.1V/100M	30	0.1V/250M	1240	0.093	5.2
SWI0402HV-15N□	15.0	G,J,K	0.1V/100M	31	0.1V/250M	1150	0.114	5.5
SWI0402HV-18N□	18.0	G,J,K	0.1V/100M	30	0.1V/250M	1050	0.130	5.2
SWI0402HV-23N□	23.0	G,J,K	0.1V/100M	29	0.1V/250M	760	0.201	4.5
SWI0402HV-27N□	27.0	G,J,K	0.1V/100M	30	0.1V/250M	680	0.288	4.0
SWI0402HV-30N□	30.0	G,J,K	0.1V/100M	30	0.1V/250M	660	0.309	3.8
SWI0402HV-33N□	33.0	G,J,K	0.1V/100M	30	0.1V/250M	620	0.336	3.6
SWI0402HV-36N□	36.0	G,J,K	0.1V/100M	30	0.1V/250M	540	0.431	3.5
SWI0402HV-47N□	47.0	G,J,K	0.1V/100M	25	0.1V/200M	440	0.648	3.2
SWI0402HV-56N□	56.0	G,J,K	0.1V/100M	25	0.1V/200M	340	0.996	2.9

Note:

- All test data referenced to 25°C ambient.

5. Recommended PC Board Pattern

Chip size						Land Patterns For Reflow Soldering		
Series	Type	A(mm)	B(mm)	C(mm)	D(mm)	L(mm)	G(mm)	H(mm)
SWI	0402	1.00±0.2.	0.60±0.2.	0.56±0.1	0.20±0.10	1.42	0.60	0.66

